

DATA SHEET V400F

VIBRATION ISOLATION PAD

PYRAMAT-30S (SOFT)

PYRAMAT-30M (MEDIUM)

PYRAMAT-30H (HARD)


THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

CAPACITY (PER PAD)

| TYPE | COLOUR CODE | LOAD * Kg | DEFLECTION * mm |
|--------------|-------------|--------------|--------------------|
| 30S (SOFT) | BLUE | 50* | 10* |
| 30M (MEDIUM) | RED | 300* | 10* |
| 30H (HARD) | WHITE | 3000* | 10* |

* RECOMENDED MAXIMUM - ALL VALUES ARE NOMINAL

PAD DIMENSIONS

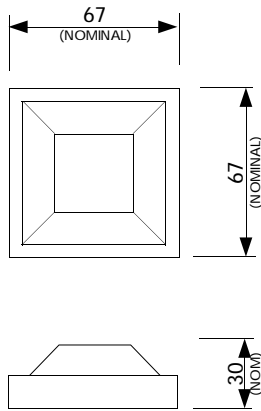



DESCRIPTION

SUPPLIED IN MATS OR INDIVIDUAL PADS, PYRAMAT IS A HIGHLY EFFECTIVE AND COST EFFICIENT NOISE AND VIBRATION ISOLATION MATERIAL DESIGNED TO GIVE OPTIMISED DEFLECTION AND STABILITY.


THE PADS ARE MOULDED FROM 100% RECYCLED NEOPRENE/RUBBER AND FORMED WITH A POLYURETHANE BINDER.

PYRAMAT IS PARTICULARLY SUITED TO FLOATING FLOOR APPLICATIONS AND CAN BE EASILY CUT TO SUIT VIRTUALLY ANY APPLICATION.

MAT DIMENSIONS

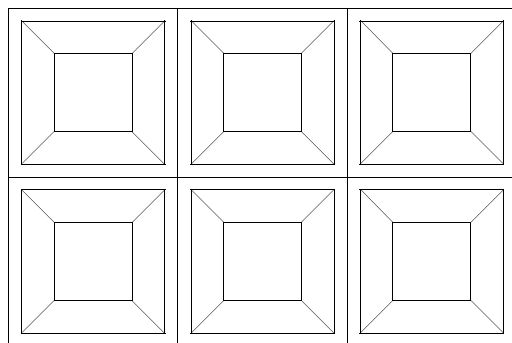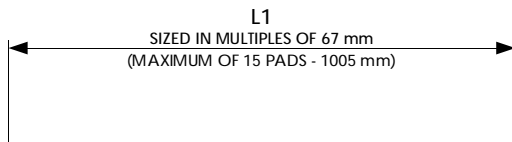

OPTIONAL LOAD SPREADER PLATE IN ZINC PLATED STEEL WITH RIBBED NEOPRENE UPPER SURFACE - SUFFIX ZN




FEATURES

- WIDE LOAD RANGE
- HIGH DEFLECTION
- EXCELLENT VIBRATION ISOLATION
- SOUND ABSORBENT
- RESILIENT
- EASILY CUT
- VERSATILE
- DURABLE
- RECYCLED MATERIALS



ALLAWAY
ACOUSTICS
LIMITED
www.allawayacoustics.co.uk

LOAD/DEFLECTION GRAPH (PER PAD)

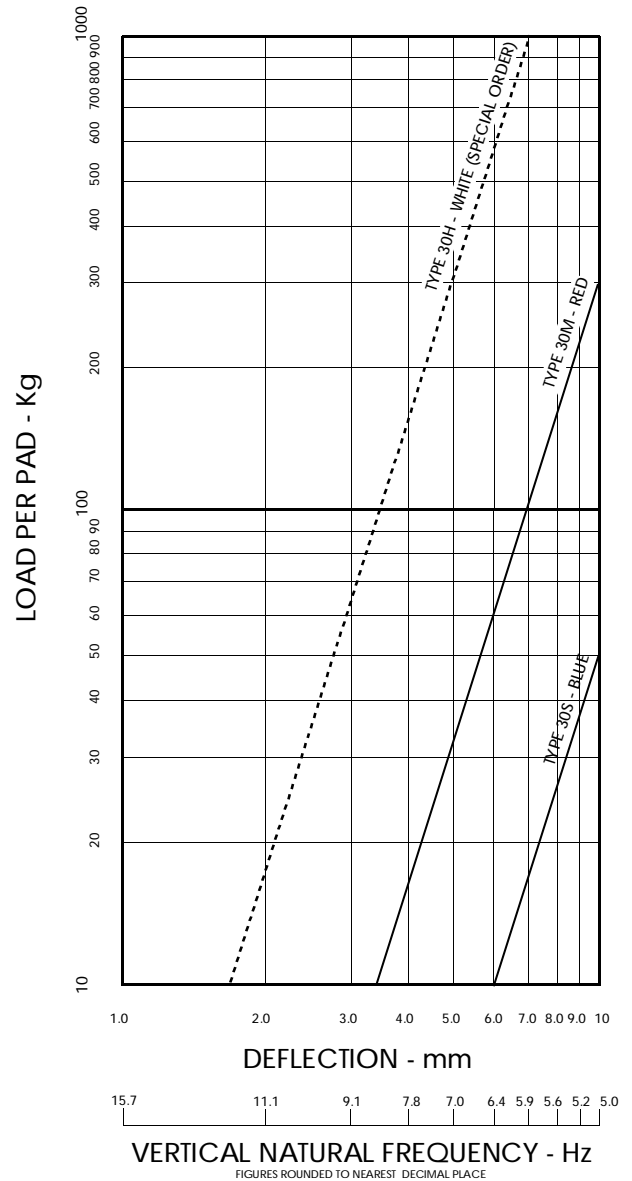

NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

TYPE 30H (WHITE) BY SPECIAL ORDER.

SUFFIX

SP - SPECIAL CONSTRUCTION. SEE EQUIPMENT SCHEDULE FOR DETAILS.

ZN - PYRAMAT SUPPLIED WITH LOAD SPREADER PLATE IN ZINC PLATED STEEL WITH RIBBED NEOPRENE UPPER SURFACE