

# DATA SHEET V600F

## SPRING MOUNT

### CMS1 RANGE

#### OPEN COIL


THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

### CAPACITY

TYPE	COLOUR CODE	LOAD * Kg	DEFLECTION * mm
1	BROWN	52	39
2	GREEN	57	37
3	WHITE	86	32
4	BLUE	119	28
5	ORANGE	150	24

\*IMPORTANT : VALUES SHOWN ARE MAXIMUM WITH SPRING IN SOLID CONDITION. RECOMMENDED OVERLOAD CAPACITY IS 50%.

### DIMENSIONS

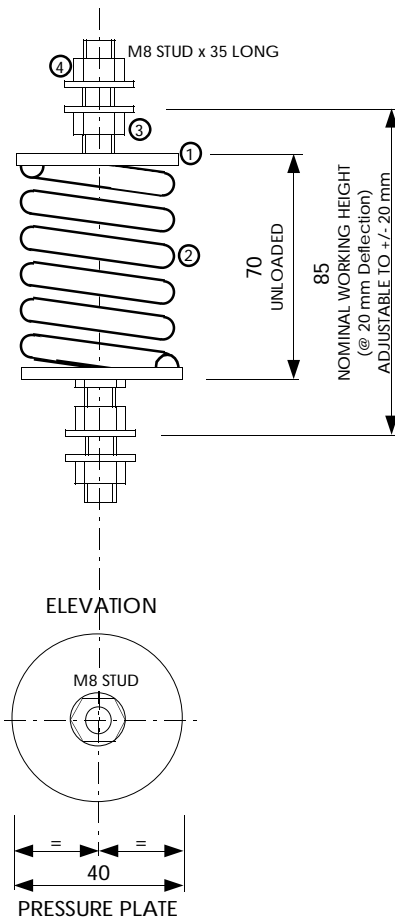

### COMPONENTS

1. SPRING PRESSURE PLATE.
2. COLOUR CODED HIGH DEFLECTION STEEL SPRING .
3. ADJUSTING NUT. INSTALLERS TO LUBRICATE WITH FREEING OIL (WD40).
4. LOCKING NUT.

### FINISH

PASSIVATED ZINC PLATING TO METAL COMPONENTS.

POLYESTER COATING TO SPRING (COLOUR CODED).

SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.


### FEATURES

- OPEN COIL
- FULLY CAPTIVE
- HIGH LOAD CAPACITY
- HIGH DEFLECTION
- ALL STEEL CONSTRUCTION
- HIGH FREQUENCY ISOLATION
- ZINC PLATED COMPONENTS
- POWDER COATED SPRING
- COLOUR CODED



**ALLAWAY**  
**ACOUSTICS**  
LIMITED  
www.allawayacoustics.co.uk

### LOAD/DEFLECTION GRAPH

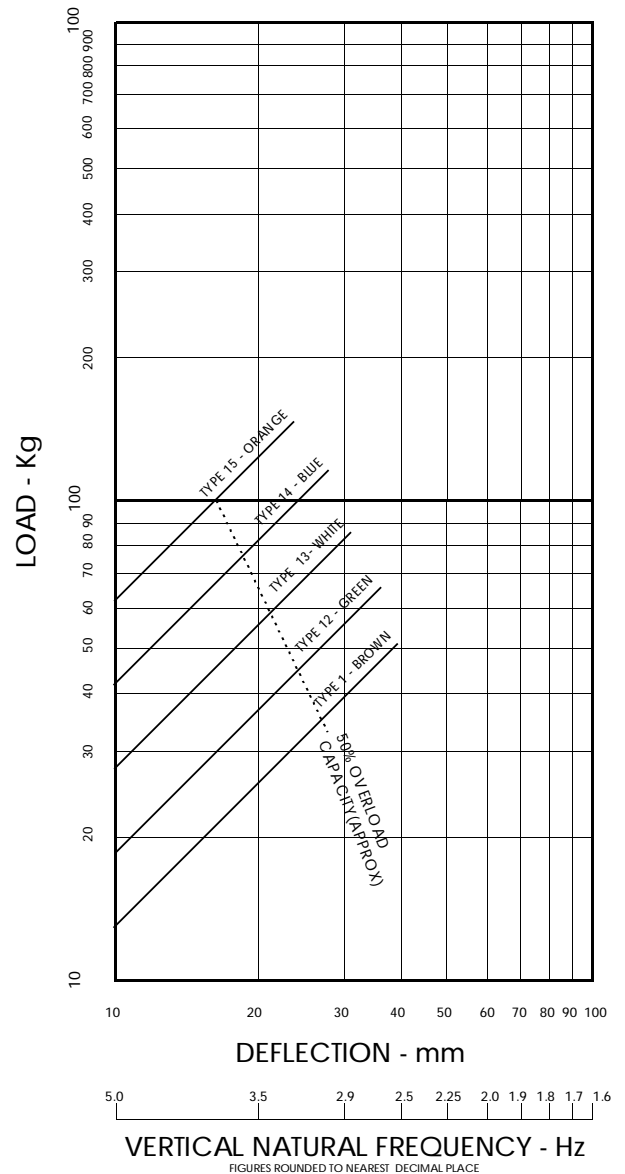

### NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

THE SPRING WILL NEED ADJUSTING AFTER INSTALLATION.

SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.

### SUFFIX

CM(-) - OPEN COIL SPRING MOUNT.

SP - SPECIAL CONSTRUCTION. SEE EQUIPMENT SCHEDULE FOR DETAILS.