


# DATA SHEET A02G RECTANGULAR ATTENUATOR FLANGED MODEL SP / MODEL SL



THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A DATED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

## DIMENSIONS

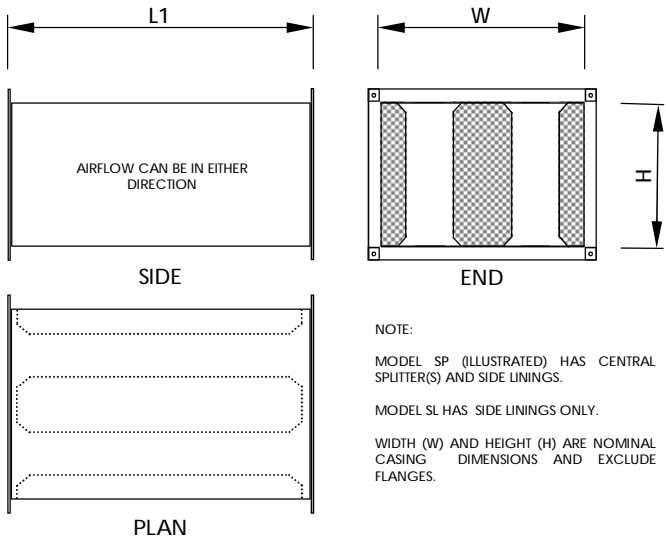

## SPECIFICATION

ATTENUATORS ARE CONSTRUCTED IN ACCORDANCE WITH DW 144 SPECIFICATION FOR MEDIUM PRESSURE (CLASS B) DUCTWORK.

CASES ARE STIFFENED AND FITTED WITH PROPRIETARY FLANGES.

MODEL SP - HAS SOUND ABSORBENT SPLITTERS ARRANGED VERTICALLY WITHIN THE CASING TO FORM A SERIES OF CENTRAL ELEMENTS AND SIDE LININGS.

MODEL SL - HAS SOUND ABSORBENT SPLITTERS ARRANGED VERTICALLY WITHIN THE CASING TO FORM SIDE LININGS ONLY.

SPLITTERS AND SIDE LININGS CONTAIN A SOUND ABSORBENT INFILL THAT IS ENCAPSULATED WITH GLASS CLOTH AND PLAIN/PERFORATED STEEL.

SPLITTERS HAVE AERODYNAMIC FAIRINGS AT EACH END.

## NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

LARGER ATTENUATORS WILL BE OF MODULAR CONSTRUCTION FOR EASE OF HANDLING AND MAY BE SPLIT ON THE LENGTH, WIDTH, HEIGHT OR COMBINATION THEREOF (SEE DATA SHEET A09 FOR DETAILS).

ATTENUATORS WILL BE SUPPLIED WITHOUT SUPPORT STEELWORK, BRACKETS, FIXINGS, GASKET, MASTIC OR OTHER SUCH ITEMS, UNLESS OTHERWISE STATED.

IT IS THE INSTALLERS RESPONSIBILITY TO PROVIDE THE FLANGE SEAL TO THE CONNECTING DUCT.

INSERTION LOSS, PRESSURE LOSS AND FLOW NOISE ARE DERIVED FROM TESTS CARRIED OUT IN ACCORDANCE WITH ISO 7235 AND MAY VARY DEPENDING ON INSTALLED CONDITIONS.

MANUFACTURING DIMENSIONAL TOLERANCE < 1.0 %.

## SUFFIX

THE SUFFIX TO THE ATTENUATOR MODEL DEFINES THE MATERIAL OF FABRICATION AND ANY ADDITIONAL FEATURES OR SPECIAL CONSTRUCTIONAL DETAILS.

- G - PRE-GALVANISED STEEL CONSTRUCTION.
- S - GRADE 316 STAINLESS STEEL CONSTRUCTION.
- H1 - HIGH TEMPERATURE APPLICATION (2 HOUR/300°C).
- D - DOUBLE SKIN CASING (CASING SIZE W+50 x H+50).
- C - HIGH PRESSURE APPLICATION (DW 144, CLASS C).
- K - PROTECTIVE PAINT FINISH TO VISIBLE INTERNAL METAL SURFACES.
- J - SPLITTERS AND/OR SIDE LININGS ARRANGED HORIZONTALLY.
- M - MELINEX ENCAPSULATED INFILL.
- Z(\*\*\*) - MODULAR CONSTRUCTION (SEE DATA SHEET A09 FOR DETAILS).
- X - SPECIAL CONSTRUCTION, REFER TO EQUIPMENT SCHEDULE FOR DETAILS.

## FLANGE DETAILS

ATTENUATORS ARE FITTED WITH 30 mm PROFILE FLANGES COMPLYING WITH DW144 AND DW/TM1.

## STANDARD SIZES

LENGTH (L1) - 600, 900, 1200, 1500, 1800, 2100, 2400, 2700, & 3000 mm.

WIDTH (W) - ANY DIMENSION ABOVE 149 mm.

HEIGHT (H) - ANY DIMENSION ABOVE 99 mm.

ALL ATTENUATORS ARE MADE TO ORDER.

NON STANDARD ATTENUATORS ARE AVAILABLE.

## WEIGHT

WEIGHTS ARE GIVEN ON THE EQUIPMENT SCHEDULE.

## MODULAR CONSTRUCTION

ATTENUATORS MANUFACTURED IN ONE SECTION WILL HAVE NO "Z" SUFFIX IN THE CODE.

WHEN ATTENUATORS ARE SUPPLIED IN MODULAR FORM, THE ACTUAL NUMBER OF SECTIONS IN THE LENGTH, WIDTH AND HEIGHT DEFINED BY THE "Z" SUFFIX. REFER TO DATA SHEET A09 FOR DETAILS.

Z	#	#	#
A "Z" SUFFIX IN THE ATTENUATOR CODE DENOTES THAT THE ATTENUATOR WILL BE SUPPLIED IN MODULES.	NUMBER OF MODULES IN LENGTH.	NUMBER OF MODULES IN WIDTH.	NUMBER OF MODULES IN HEIGHT.