


# DATA SHEET A04G RECTANGULAR ATTENUATOR VERTICAL BEND FLANGED MODEL SP/MODEL SL



THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A DATED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

## DIMENSIONS

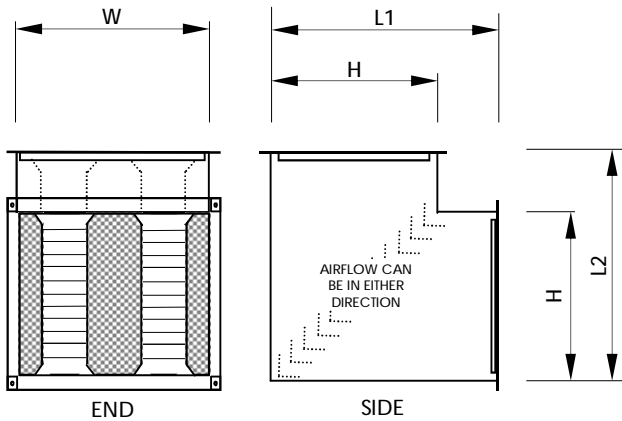

LENGTHS (L1) AND (L2), WIDTH (W) AND HEIGHT (H) ARE NOMINAL CASING DIMENSIONS AND EXCLUDE FLANGES.

MODEL SP (ILLUSTRATED) HAS CENTRAL SPLITTER(S) AND SIDE LININGS.

MODEL SL HAS SIDE LININGS ONLY.

## SPECIFICATION

ATTENUATORS ARE CONSTRUCTED IN ACCORDANCE WITH DW 144 SPECIFICATION FOR MEDIUM PRESSURE (CLASS B) DUCTWORK.

CASES ARE STIFFENED AND FITTED WITH PROPRIETARY FLANGES.

MODEL SP - HAS SOUND ABSORBENT SPLITTERS ARRANGED VERTICALLY WITHIN THE CASING TO FORM A SERIES OF CENTRAL ELEMENTS AND SIDE LININGS.

MODEL SL - HAS SOUND ABSORBENT SPLITTERS ARRANGED VERTICALLY WITHIN THE CASING TO FORM SIDE LININGS ONLY.

SPLITTERS AND SIDE LININGS CONTAIN A SOUND ABSORBENT INFILL THAT IS ENCAPSULATED WITH GLASS CLOTH AND PLAIN/PERFORATED STEEL.

SPLITTERS HAVE AERODYNAMIC FAIRINGS AT EACH END.

## NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

EXCESSIVELY LARGE OR HEAVY ATTENUATORS MAY BE MANUFACTURED IN MATING SECTIONS FOR EASE OF HANDLING.

ATTENUATORS WILL BE SUPPLIED WITHOUT SUPPORT STEELWORK, BRACKETS, FIXINGS, GASKET, MASTIC OR OTHER SUCH ITEMS, UNLESS OTHERWISE STATED.

IT IS THE INSTALLERS RESPONSIBILITY TO PROVIDE THE FLANGE SEAL TO THE CONNECTING DUCT.

INSERTION LOSS, PRESSURE LOSS AND FLOW NOISE ARE DERIVED FROM TESTS CARRIED OUT IN ACCORDANCE WITH ISO 7235 AND MAY VARY DEPENDING ON INSTALLED CONDITIONS.

MANUFACTURING DIMENSIONAL TOLERANCE < 1.0 %.

## SUFFIX

THE SUFFIX TO THE ATTENUATOR CODE DEFINES THE MATERIAL OF FABRICATION AND ANY ADDITIONAL FEATURES OR SPECIAL CONSTRUCTIONAL DETAILS.

BV - VERTICAL BEND

G - PRE-GALVANISED STEEL CONSTRUCTION.

S - GRADE 316 STAINLESS STEEL CONSTRUCTION.

H1 - HIGH TEMPERATURE APPLICATION (2 HOUR/300°C).

D - DOUBLE SKIN CASING (CASING SIZE W+50 x H+50).

C - HIGH PRESSURE APPLICATION (DW 144, CLASS C).

K - PROTECTIVE PAINT FINISH TO VISIBLE INTERNAL METAL SURFACES.

J - SPLITTERS AND/OR SIDE LININGS ARRANGED HORIZONTALLY.

M - MELINEX ENCAPSULATED INFILL.

Z - MODULAR CONSTRUCTION.

X - SPECIAL CONSTRUCTION, REFER TO EQUIPMENT SCHEDULE FOR DETAILS.

## FLANGE DETAILS

ATTENUATORS ARE FITTED WITH 30 mm PROFILE FLANGES.

## STANDARD SIZES

THERE ARE NO STANDARD SIZES.

ALL ATTENUATORS ARE MADE TO ORDER.

## WEIGHT

WEIGHTS ARE GIVEN ON THE EQUIPMENT SCHEDULE.