

# DATA SHEET A17G LOOSE SPLITTER ELEMENT MODULAR CONSTRUCTION "Z" SUFFIX



## MODULAR CONSTRUCTION

SPLITTER ELEMENTS MANUFACTURED IN ONE SECTION WILL HAVE NO "Z" SUFFIX IN THE CODE.

WHEN SPLITTER ELEMENTS ARE SUPPLIED IN MODULAR FORM, THE ACTUAL NUMBER OF SECTIONS IN THE LENGTH AND HEIGHT IS DEFINED BY THE "Z" CODE, AS FOLLOWS:

Z	#	1	#
A "Z" SUFFIX IN THE ATTENUATOR CODE DENOTES THAT THE ATTENUATOR WILL BE SUPPLIED IN MODULES.	NUMBER OF MODULES IN LENGTH.	ONE MODULE IN WIDTH AS STANDARD	NUMBER OF MODULES IN HEIGHT.

## NOTES


EXAMPLES SHOWN BELOW ARE FOR ILLUSTRATION PURPOSES ONLY AND LOOSE SPLITTER ELEMENTS MAY BE SUPPLIED IN ANY COMBINATION OF SECTIONS ON LENGTH OR HEIGHT. ALWAYS REFER TO THE "Z" CODE GIVEN IN THE SUFFIX COLUMN OF THE EQUIPMENT SCHEDULE.

DIMENSIONS GIVEN ON THE EQUIPMENT SCHEDULE ARE THE OVERALL LENGTH (L), WIDTH (W) AND HEIGHT (H)


ASSEMBLY INSTRUCTIONS ARE SHOWN ON A SEPARATE DATA SHEET. ASSEMBLY BY OTHERS.

FIXINGS ARE PROVIDED TO JOIN ADJACENT SPLITTER ELEMENT SECTIONS. FIXINGS TO DUCT OR AHU CASING BY OTHERS.


MANUFACTURING AND ASSEMBLY DIMENSIONAL TOLERANCE < 1.0%




NO "Z" SUFFIX

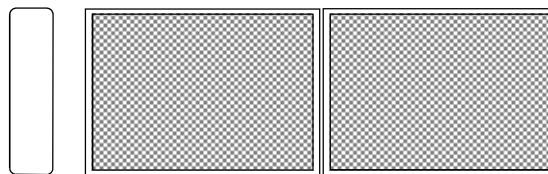


Z 211




Z 112

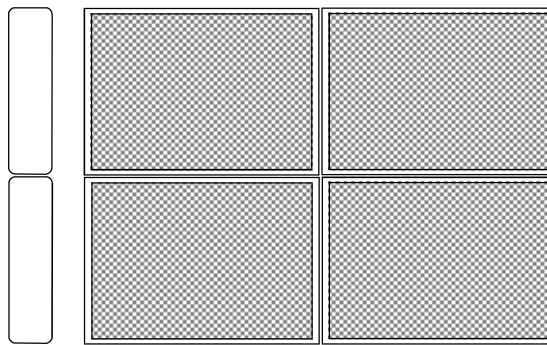

Z 212

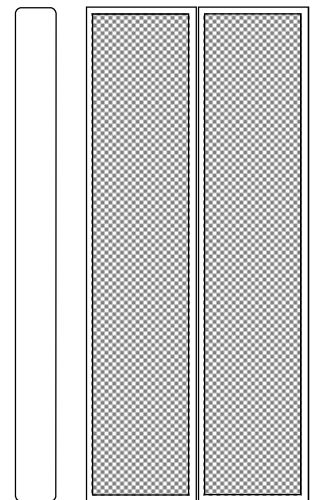

Z 211

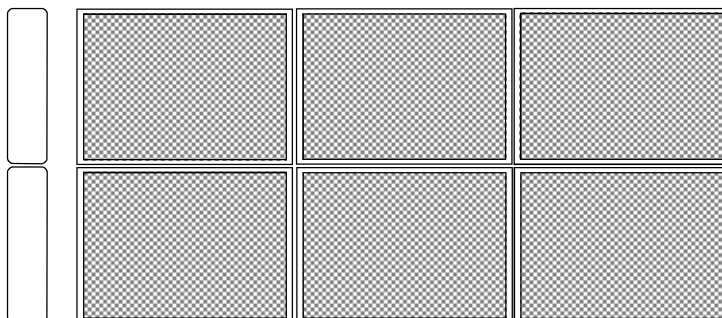

Z 312

MAXIMUM MODULE HEIGHT		NOMINAL MODULE LENGTH
3300 mm	@	600 mm
3000 mm	@	900 mm
2600 mm	@	1200 mm
2250 mm	@	1500 mm