


DATA SHEET A18G RECTANGULAR ATTENUATOR CIRCULAR SPIGOT MODEL SL



THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A DATED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

DIMENSIONS

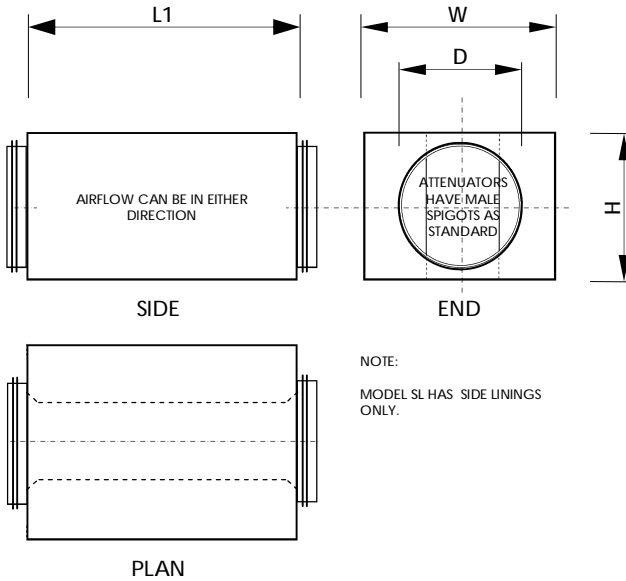

LENGTH (L1), WIDTH (W) AND HEIGHT (H) ARE NOMINAL CASING DIMENSIONS.

ATTENUATOR HAS MALE SPIGOT TO SUIT NOMINAL DUCT DIAMETER (D).

SPECIFICATION

ATTENUATORS ARE CONSTRUCTED IN ACCORDANCE WITH DW 144 SPECIFICATION FOR MEDIUM PRESSURE (CLASS B) DUCTWORK.

CASES ARE STIFFENED AND HAVE MALE SPIGOTS WITH INTEGRAL SEALS.

MODEL SP - HAS SOUND ABSORBENT SPLITTERS ARRANGED VERTICALLY WITHIN THE CASING TO FORM A SERIES OF CENTRAL ELEMENTS AND SIDE LININGS.

MODEL SL - HAS SOUND ABSORBENT SPLITTERS ARRANGED VERTICALLY WITHIN THE CASING TO FORM SIDE LININGS ONLY.

SPLITTERS AND SIDE LININGS CONTAIN A SOUND ABSORBENT INFILL THAT IS ENCAPSULATED WITH GLASS CLOTH AND PLAIN/PERFORATED STEEL.

SPLITTERS HAVE AERODYNAMIC FAIRINGS AT EACH END.

NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

EXCESSIVELY LARGE OR HEAVY ATTENUATORS MAY BE MANUFACTURED IN MATING SECTIONS FOR EASE OF HANDLING.

ATTENUATORS WILL BE SUPPLIED WITHOUT SUPPORT STEELWORK, BRACKETS, FIXINGS, GASKET, MASTIC OR OTHER SUCH ITEMS, UNLESS OTHERWISE STATED.

IT IS THE INSTALLERS RESPONSIBILITY TO SEAL THE ATTENUATOR TO THE CONNECTING DUCT.

INSERTION LOSS, PRESSURE LOSS AND FLOW NOISE DATA ARE DERIVED FROM TESTS CARRIED OUT IN ACCORDANCE WITH ISO 7235 AND MAY VARY DEPENDING ON INSTALLED CONDITIONS.

MANUFACTURING DIMENSIONAL TOLERANCE < 1.0 %.

SUFFIX

THE SUFFIX TO THE ATTENUATOR MODEL DEFINES THE MATERIAL OF FABRICATION AND ANY ADDITIONAL FEATURES OR SPECIAL CONSTRUCTIONAL DETAILS.

E - CIRCULAR SPIGOT.

G - PRE-GALVANISED STEEL CONSTRUCTION.

S - GRADE 316 STAINLESS STEEL CONSTRUCTION.

H1 - HIGH TEMPERATURE APPLICATION (2 HOUR/300°C).

D - DOUBLE SKIN CASING (OVERALL DIMENSION DOES NOT CHANGE).

C - HIGH PRESSURE APPLICATION (DW 144, CLASS C).

K - PROTECTIVE PAINT FINISH TO VISIBLE INTERNAL METAL SURFACES.

J - SPLITTERS AND/OR SIDE LININGS ARRANGED HORIZONTALLY.

M - MELINEX ENCAPSULATED INFILL.

Z(*) - MODULAR CONSTRUCTION (* NUMBER OF MODULES).

X - SPECIAL CONSTRUCTION, REFER TO EQUIPMENT SCHEDULE FOR DETAILS.

FLANGE DETAILS

ATTENUATORS ARE FITTED WITH MALE SPIGOTS AS STANDARD.

STANDARD SIZES

LENGTH (L1) - 600, 900, 1200, 1500, 1800, 2100, 2400, 2700 & 3000 mm.

DIAMETER(D) - 100, 125, 150, 160, 180, 200, 224, 250, 300, 315, 355, 400, 450 & 500 mm.

WIDTH (W) - SEE EQUIPMENT SCHEDULE.

HEIGHT (H) - SEE EQUIPMENT SCHEDULE.

ALL ATTENUATORS ARE MADE TO ORDER.

NON STANDARD ATTENUATORS ARE AVAILABLE.

WEIGHT

WEIGHTS ARE GIVEN ON THE EQUIPMENT SCHEDULE.