

DATA SHEET V110F

SPRING MOUNT

M10 RANGE

OPEN COIL




THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

CAPACITY

TYPE	COLOUR CODE	LOAD * Kg	DEFLECTION * mm
11	BROWN	74	54
12	GREEN	102	51
13	WHITE	131	43
14	BLUE	175	41
15	ORANGE	234	39
16	PURPLE	331	35

*IMPORTANT : VALUES SHOWN ARE MAXIMUM WITH SPRING IN SOLID CONDITION. RECOMMENDED OVERLOAD CAPACITY IS 50%.



DIMENSIONS

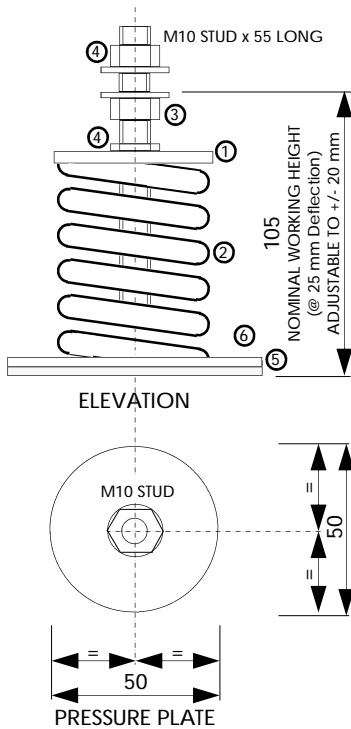

COMPONENTS

1. SPRING PRESSURE PLATE.
2. COLOUR CODED HIGH DEFLECTION STEEL SPRING (TYPE N HAS NESTED SPRING).
3. ADJUSTING NUT. INSTALLERS TO LUBRICATE WITH FREEING OIL (WD40)
4. LOCKING NUT.
5. HIGH FREQUENCY ISOLATION PAD.
6. 10 mm HOLDING DOWN BOLT HOLES.

LOAD/DEFLECTION GRAPH

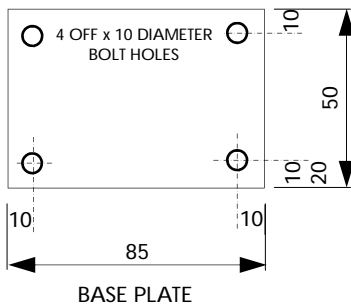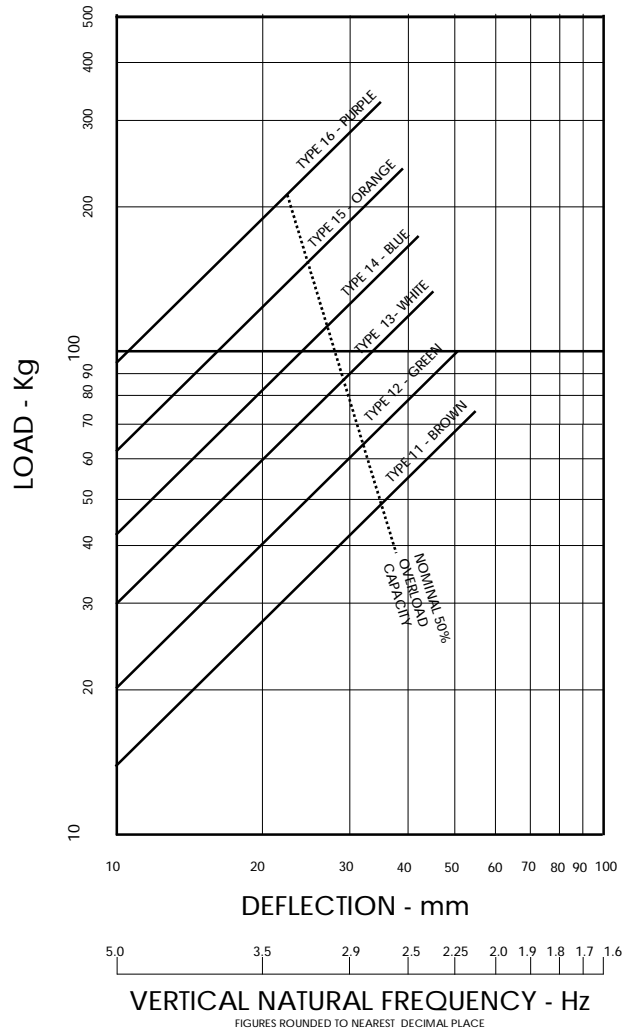

FINISH

PASSIVATED ZINC PLATING TO METAL COMPONENTS.

POLYESTER COATING TO SPRING (COLOUR CODED).

SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.

NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

THE SPRING WILL NEED ADJUSTING AFTER INSTALLATION.

HOLDING DOWN BOLTS TO BE SUPPLIED AND FITTED BY OTHERS.

SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.

SUFFIX

M(-) - OPEN COIL SPRING MOUNT.

SP - SPECIAL CONSTRUCTION. SEE EQUIPMENT SCHEDULE FOR DETAILS.