

DATA SHEET V120F

SPRING MOUNT

M20 RANGE

OPEN COIL






THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

CAPACITY

| TYPE | COLOUR CODE | LOAD * Kg | DEFLECTION * mm |
|------|-------------|--------------|--------------------|
| 21 | BROWN | 206 | 61 |
| 22 | GREEN | 274 | 54 |
| 23 | WHITE | 366 | 51 |
| 24 | BLUE | 497 | 49 |
| 25 | ORANGE | 646 | 43 |
| 26 | PURPLE | 958 | 38 |
| 26N | PURPLE/GOLD | 1330 | 38 |

*IMPORTANT : VALUES SHOWN ARE MAXIMUM WITH SPRING IN SOLID CONDITION. RECOMMENDED OVERLOAD CAPACITY IS 50%.


DIMENSIONS

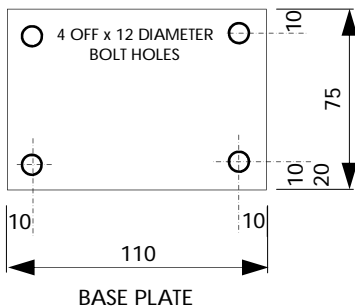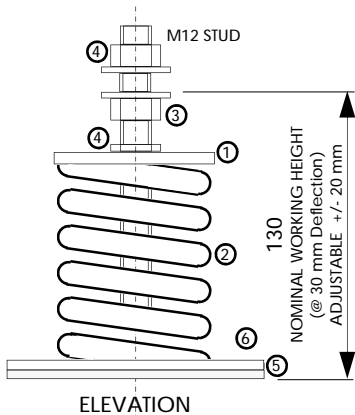

COMPONENTS

1. SPRING PRESSURE PLATE.
2. COLOUR CODED HIGH DEFLECTION STEEL SPRING (TYPE N HAS NESTED SPRING).
3. ADJUSTING NUT. INSTALLERS TO LUBRICATE WITH FREEING OIL (WD40)
4. LOCKING NUT.
5. HIGH FREQUENCY ISOLATION PAD.
6. 12 mm HOLDING DOWN BOLT HOLES.

LOAD/DEFLECTION GRAPH

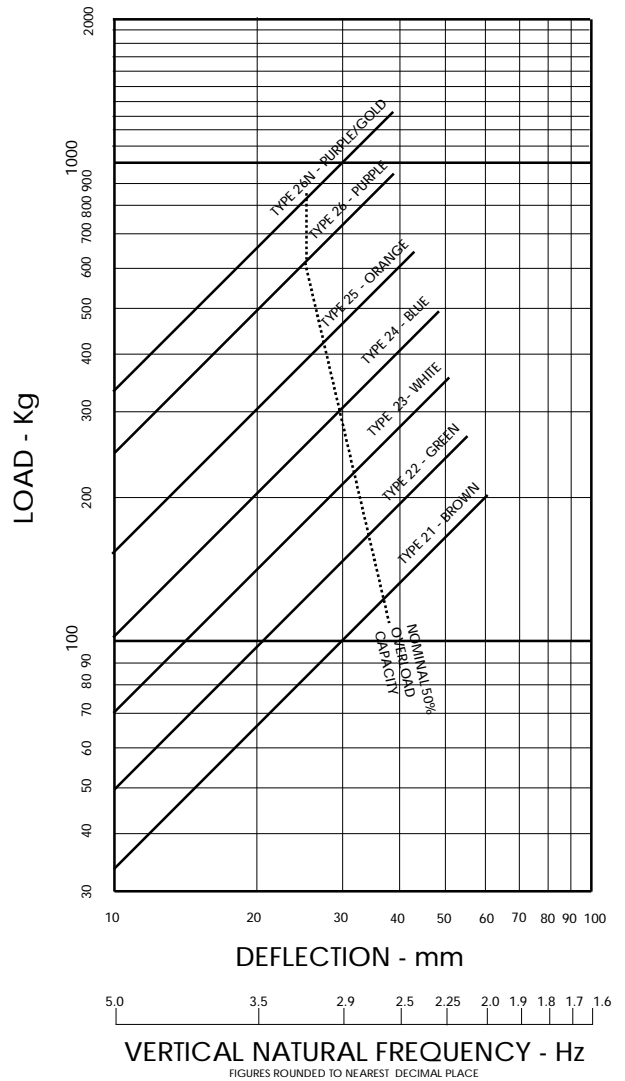

FINISH

- PASSIVATED ZINC PLATING TO METAL COMPONENTS.
- POLYESTER COATING TO SPRING (COLOUR CODED).
- SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.

NOTES

- THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.
- THE SPRING WILL NEED ADJUSTING AFTER INSTALLATION.
- HOLDING DOWN BOLTS TO BE SUPPLIED AND FITTED BY OTHERS.
- SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.

SUFFIX

- M(-) - OPEN COIL SPRING MOUNT.
- SP - SPECIAL CONSTRUCTION. SEE EQUIPMENT SCHEDULE FOR DETAILS.