


DATA SHEET **V400F**
VIBRATION ISOLATION PAD
PYRAMAT-30S (SOFT)
PYRAMAT-30M (MEDIUM)
PYRAMAT-30H (HARD)



THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

PAD DIMENSIONS

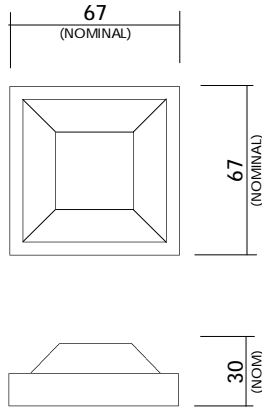


DESCRIPTION

SUPPLIED IN MATS OR INDIVIDUAL PADS, PYRAMAT IS A HIGHLY EFFECTIVE AND COST EFFICIENT NOISE AND VIBRATION ISOLATION MATERIAL DESIGNED TO GIVE OPTIMISED DEFLECTION AND STABILITY.


THE PADS ARE MOULDED FROM 100% RECYCLED NEOPRENE/RUBBER AND FORMED WITH A POLYURETHANE BINDER.

PYRAMAT IS PARTICULARLY SUITED TO FLOATING FLOOR APPLICATIONS AND CAN BE EASILY CUT TO SUIT VIRTUALLY ANY APPLICATION.

LOAD/DEFLECTION GRAPH (PER PAD)

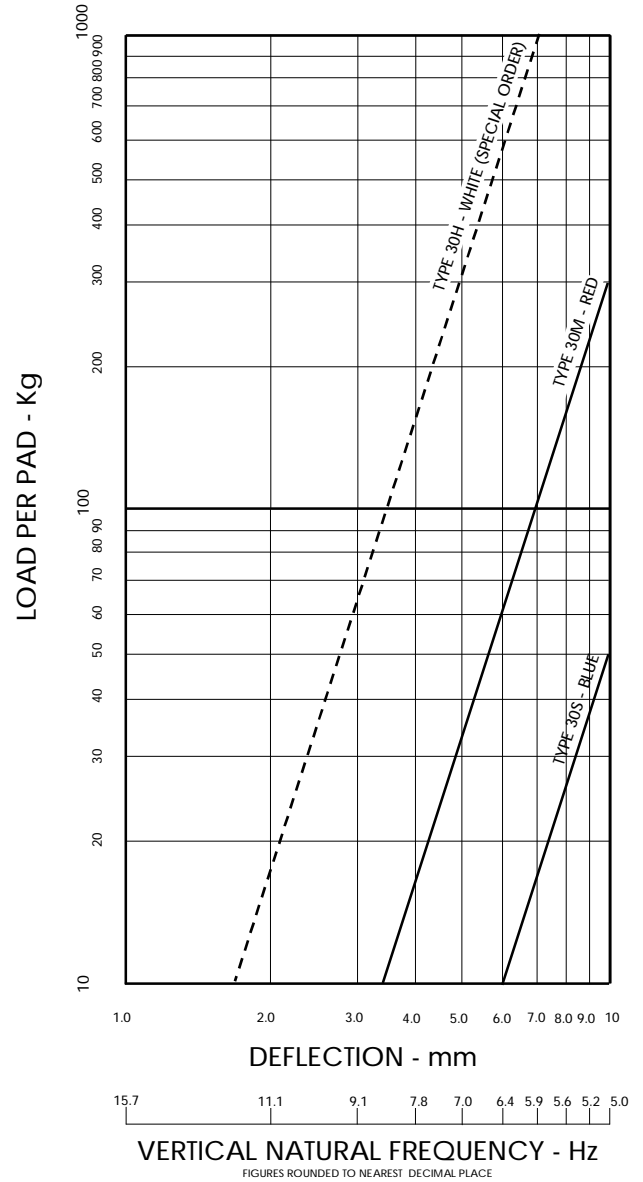

MAT DIMENSIONS

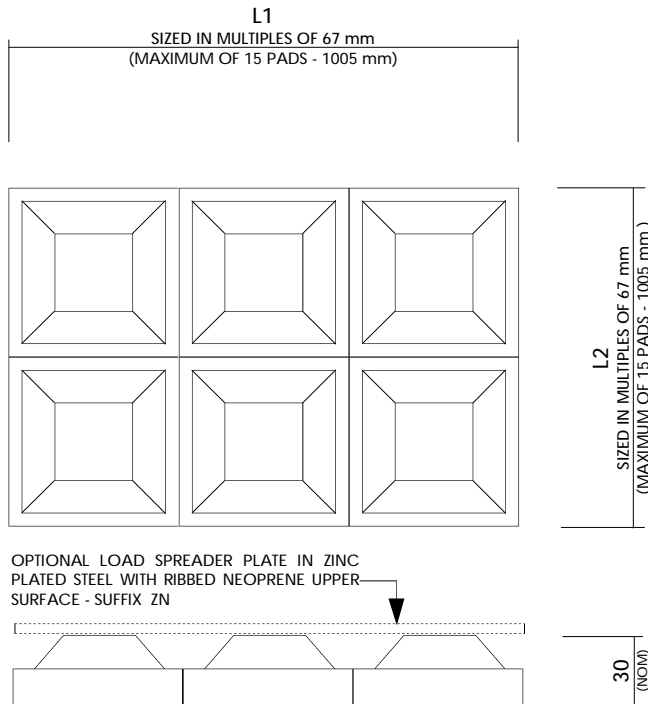

FEATURES

- WIDE LOAD RANGE / HIGH DEFLECTION
- VIBRATION / SOUND ABSORBENT
- RESILIENT / EASILY CUT / VERSATILE / DURABLE
- RECYCLED MATERIALS

NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.

TYPE 30H (WHITE) BY SPECIAL ORDER.

SUFFIX

SP - SPECIAL CONSTRUCTION. SEE EQUIPMENT SCHEDULE FOR DETAILS.

ZN - PYRAMAT SUPPLIED WITH LOAD SPREADER PLATE IN ZINC PLATED STEEL WITH RIBBED NEOPRENE UPPER SURFACE