


DATA SHEET V710G  
 INERTIA BASE  
 IB-I RANGE  
 BOLTED CONSTRUCTION  
 IN-BOARD MOUNTS



THIS IS NOT A STAND ALONE DOCUMENT AND UNLESS REFERRED TO IN A CERTIFIED EQUIPMENT SCHEDULE IS SUBJECT TO REVISION WITHOUT NOTICE.

DIMENSIONS

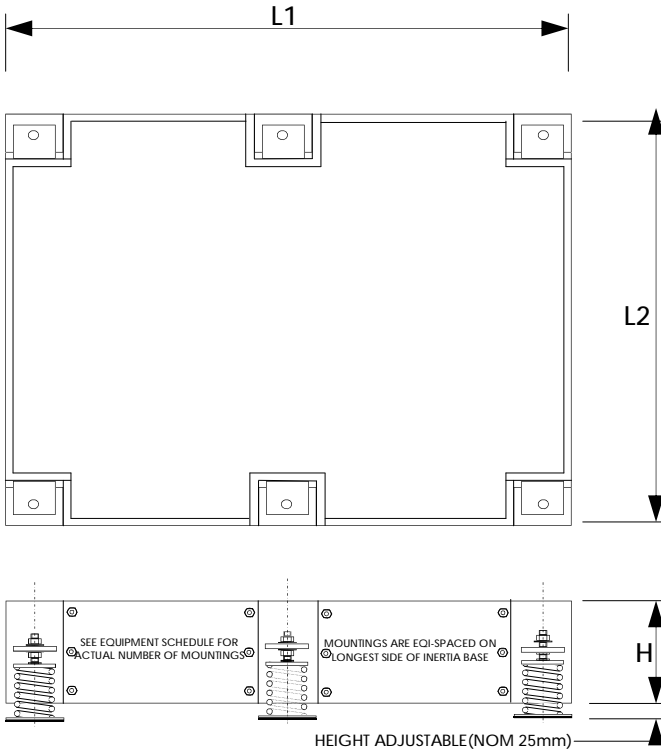

MOUNT DETAILS

MOUNT	A	B	C	D	E	G	MOUNT DATA SHEET
M10 RANGE	50	100	35	80	12	6	V110
M20 RANGE	75	125	55	105	14	8	V120
M30 RANGE	100	150	75	150	18	10	V130

FINISH

GALVANISED STEEL BASE.  
 PASSIVATED ZINC FITTINGS.  
 POLYESTER COATED SPRINGS (COLOUR CODED).  
 SUITABLE FOR USE IN NON-CORROSIVE EXTERNAL APPLICATIONS.

SUFFIX

M(-) - OPEN COIL SPRING MOUNT (MODEL REFERENCE GIVEN ON EQUIPMENT SCHEDULE).  
 4x - 4 MOUNT POSITIONS  
 6x - 6 MOUNT POSITIONS  
 8x - 8 MOUNT POSITIONS  
 SP - SPECIAL CONSTRUCTION. SEE EQUIPMENT SCHEDULE FOR DETAILS.

NOTES

THIS DATA SHEET IS TO BE READ IN CONJUNCTION WITH THE EQUIPMENT SCHEDULE.


MOUNTS TO BE ADJUSTED AFTER INSTALLATION.

HOLDING DOWN BOLTS TO BE SUPPLIED AND FITTED BY OTHERS.


WEIGHT

INERTIA BASE WEIGHTS ARE DETAILED ON THE EQUIPMENT SCHEDULE AND INCLUDE AN ALLOWANCE FOR THE CONCRETE FILL AT A NOMINAL DENSITY OF 2240 Kg/M<sup>3</sup>. (CONCRETE BY OTHERS)

MOUNTING - SIDE VIEW

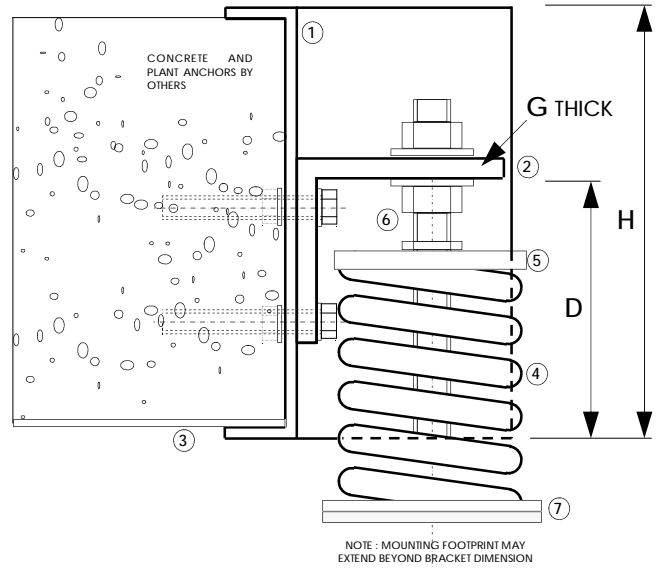

MOUNTING - PLAN VIEW

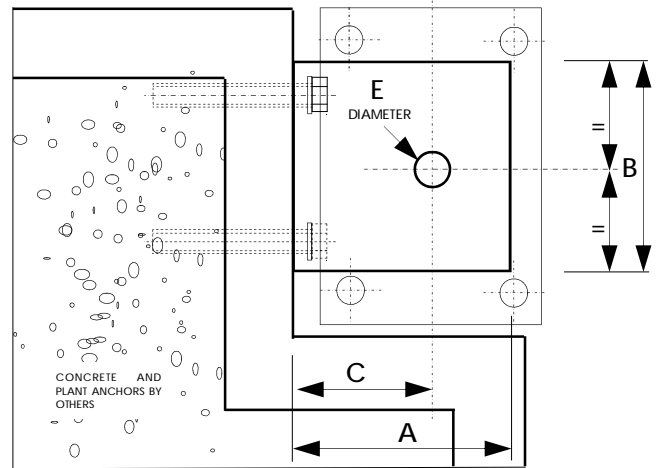

COMPONENTS

1. HEAVY GAUGE PRE-GALVANISED STEEL CHANNEL WITH BOLTED JOINTS
2. BOLTED MOUNTING BRACKETS
3. INTEGRAL FLOOR PAN
4. COLOUR CODED HIGH DEFLECTION STEEL SPRING
5. PRESSURE PLATE
6. HEIGHT ADJUSTING NUT
7. BASE PLATE WITH HIGH FREQUENCY ISOLATION PAD

FEATURES

- INTEGRAL SPRING MOUNTS
- GALVANISED STEEL FRAME
- ZINC PLATED COMPONENTS
- POWDER COATED SPRING
- INTEGRAL FLOOR PAN
- BOLTED CONSTRUCTION
- FACTORY ASSEMBLED AS STANDARD
- FLAT PACK / SELF ASSEMBLY (OPTIONAL)